





HIGHBAY GEN6



140lm/w


Technology and innovation




HIGHBAY GEN6




150W/110°

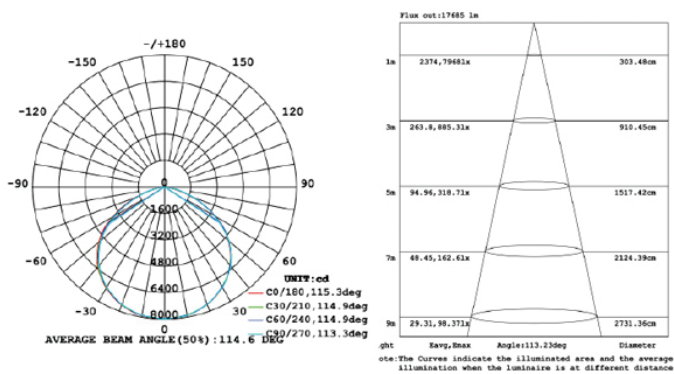

200W/110°

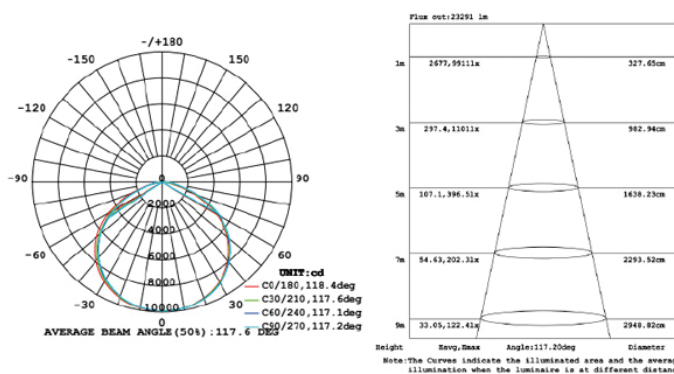

Model	Moc	Lm	Barwa	Kąt Świecenia	V	Sprawność	CRI	IP	Sterowanie	Waga	Rozmiar	Szybkość	Trwałość L80/B10	ON/OFF	Temp. Pracy
HBF-100	100W	14000	3000K/4000K 5000K/6000K	60°/110°	100-277V AC 50-60Hz	0,9	>80/>90 optional	69	ON/OFF Dali 0-10V	5,5	∅ 420x206	95%<1s	50000	≥100000	-30/+50
HBF-150	150W	21000	3000K/4000K 5000K/6000K	60°/110°	100-277V AC 50-60Hz	0,9	>80/>90 optional	69	ON/OFF Dali 0-10V	5,5	∅ 420x206	95%<1s	50000	≥100000	-30/+50
HBF-200	200W	28000	3000K/4000K 5000K/6000K	60°/110°	100-277V AC 50-60Hz	0,9	>80/>90 optional	69	ON/OFF Dali 0-10V	5,5	∅ 420x206	95%<1s	50000	≥100000	-30/+50



NEW GENERATION LED

Technology and innovation

www.ledikopro.eu