

# LINEAR LIGHT

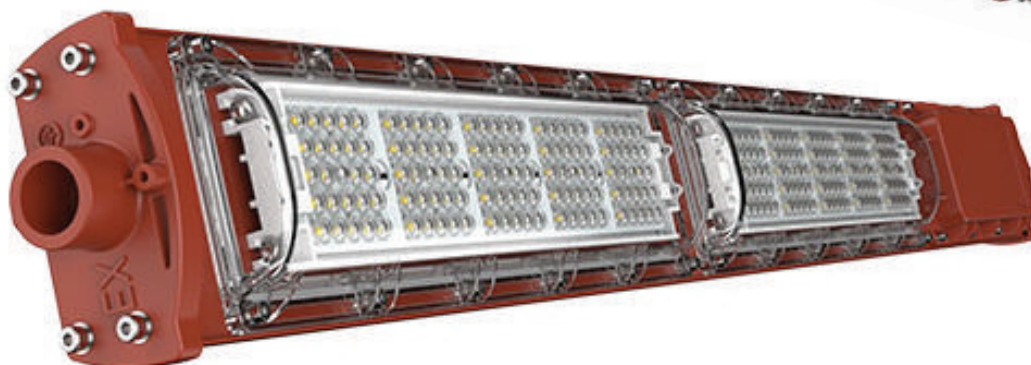
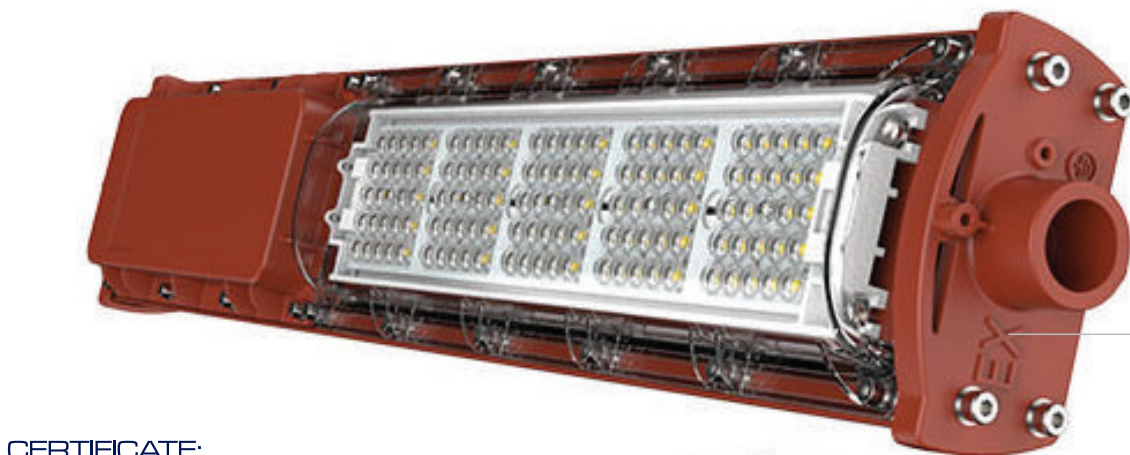
EXPLOSION PROOF -HAZARDOUS AREA

GEN 1

140lm/w

## CERTIFICATE:

|        |                                 |       |                       |
|--------|---------------------------------|-------|-----------------------|
| ATEX:  | • Ex II 2 G Ex eb mb IIC T4 Gb  | PCEC: | • Ex eb mb IIC T4 Gb  |
|        | • Ex II 2 D Ex tb IIIC T95°C Db |       |                       |
| IECEx: | • Ex eb mb IIC T4 Gb            |       | • Ex tb IIIC T95°C Db |
|        | • Ex tb IIIC T95°C Db           |       |                       |


Dimming  
Control

DALI  
Control

Daylight  
Sensor

| Model                            | Moc | Lm    | Barwa | V           | Sprawność | CRI | IK | IP | Sterowanie            | Waga | Szybkość | Trwałość | ON/OFF  | Temp. Pracy |
|----------------------------------|-----|-------|-------|-------------|-----------|-----|----|----|-----------------------|------|----------|----------|---------|-------------|
| LL-EXP-30                        | 30W | 4200  | 4000K | 120-277V AC | 0,95      | >70 | 10 | 66 | ON/OFF / Dali / 0-10V | 4,5  | 95%<1s   | 50000    | ≥100000 | -30/+60     |
| LL-EXP-40                        | 40W | 5600  | 4000K |             | 0,95      | >70 | 10 | 66 |                       | 4,5  | 95%<1s   | 50000    | ≥100000 | -30/+60     |
| LL-EXP-40<br>AWARYJNY            | 40W | 5600  | 4000K |             | 0,95      | >70 | 10 | 66 |                       | 6,5  | 95%<1s   | 50000    | ≥100000 | -30/+60     |
| LL-EXP-60                        | 60W | 8400  | 4000K |             | 0,95      | >70 | 10 | 66 |                       | 6,5  | 95%<1s   | 50000    | ≥100000 | -30/+60     |
| LL-EXP-80                        | 80W | 11200 | 4000K |             | 0,95      | >70 | 10 | 66 |                       | 7,5  | 95%<1s   | 50000    | ≥100000 | -30/+60     |
| LL-EXP-80<br>CZUJNIK MIKROFALOWY | 80W | 11200 | 4000K |             | 0,95      | >70 | 10 | 66 |                       | 7,5  | 95%<1s   | 50000    | ≥100000 | -30/+60     |