

HIGHBAY STREET LIGHT GEN 4



180lm/w



80W / 100W / 120W




150W / 200W




240W / 300W

Technology and innovation



80W / 100W / 120W

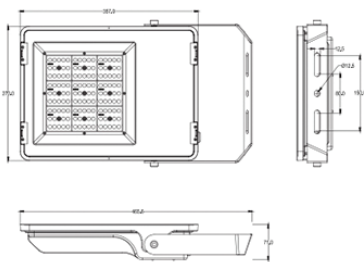


150W / 200W

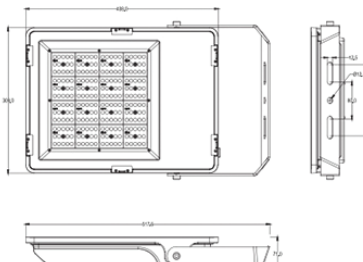

240W / 300W

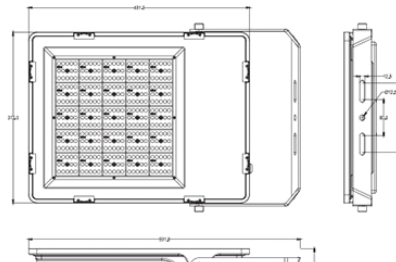

HIGHBAY STREET LIGHT GEN 4

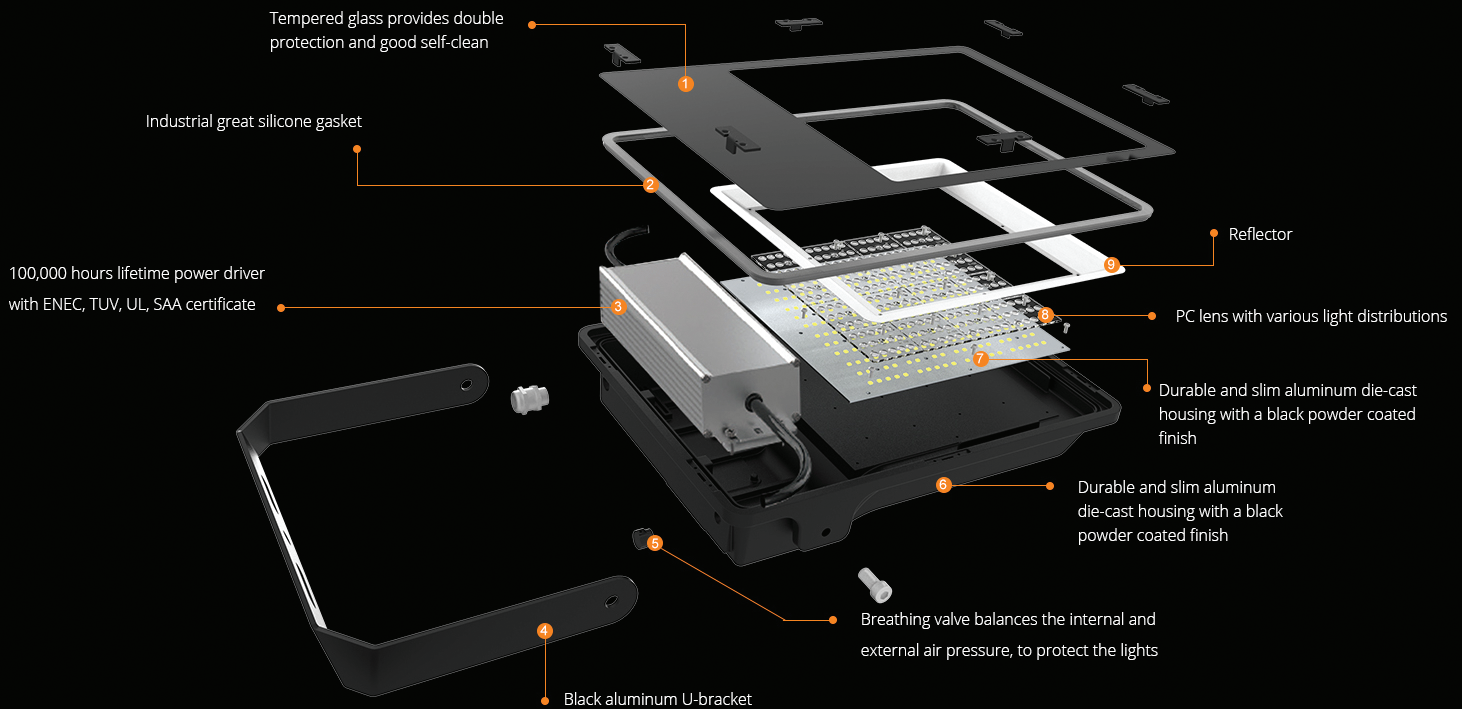


150lm/w - Lumen standard

Model	Moc	Lm	Barwa	Kąt Świecenia	V	Sprawność	CRI	IP	Rozmiar	Szybkość	Trwałość L80/B10	ON/OFF	Temp. Pracy
HBS-G4-80	80W	12000	3000-4000-5000-6000K	120°	100-277V AC 50-60Hz	0,9	>70/>80 optional	67	357x270x71	95%<1s	50000	≥100000	-30/+50
HBS-G4-100	100W	15000		120°		0,9		67	357x270x71	95%<1s	50000	≥100000	-30/+50
HBS-G4-120	120W	18000		120°		0,9		67	357x270x71	95%<1s	50000	≥100000	-30/+50
HBS-G4-150	150W	22500		120°		0,9		67	408x309x71	95%<1s	50000	≥100000	-30/+50
HBS-G4-200	200W	30000		120°		0,9		67	408x309x71	95%<1s	50000	≥100000	-30/+50
HBS-G4-240	240W	36000		120°		0,9		67	481x372x71	95%<1s	50000	≥100000	-30/+50
HBS-G4-300	300W	45000		120°		0,9		67	481x372x71	95%<1s	50000	≥100000	-30/+50

180lm/w - Lumen plus

Model	Moc	Lm	Barwa	Kąt Świecenia	V	Sprawność	CRI	IP	Rozmiar	Szybkość	Trwałość L80/B10	ON/OFF	Temp. Pracy
HBS-G4-80+	80W	14400	3000-4000-5000-6000K	120°	100-277V AC 50-60Hz	0,9	>70/>80 optional	67	357x270x71	95%<1s	50000	≥100000	-30/+50
HBS-G4-100+	100W	18000		120°		0,9		67	357x270x71	95%<1s	50000	≥100000	-30/+50
HBS-G4-120+	120W	21600		120°		0,9		67	357x270x71	95%<1s	50000	≥100000	-30/+50
HBS-G4-150+	150W	27000		120°		0,9		67	408x309x71	95%<1s	50000	≥100000	-30/+50
HBS-G4-200+	200W	36000		120°		0,9		67	408x309x71	95%<1s	50000	≥100000	-30/+50
HBS-G4-240+	240W	43200		120°		0,9		67	481x372x71	95%<1s	50000	≥100000	-30/+50
HBS-G4-300+	300W	54000		120°		0,9		67	481x372x71	95%<1s	50000	≥100000	-30/+50



NEW
GENERATION
LED

Technology and
innovation

www.ledikopro.eu