


# HIGHBAY STREET LIGHT GEN 6 PRO




140lm/w




30/40/50W





60/80W




100/120/150W




180/240W



# HIGHBAY STREET LIGHT GEN 6 PRO

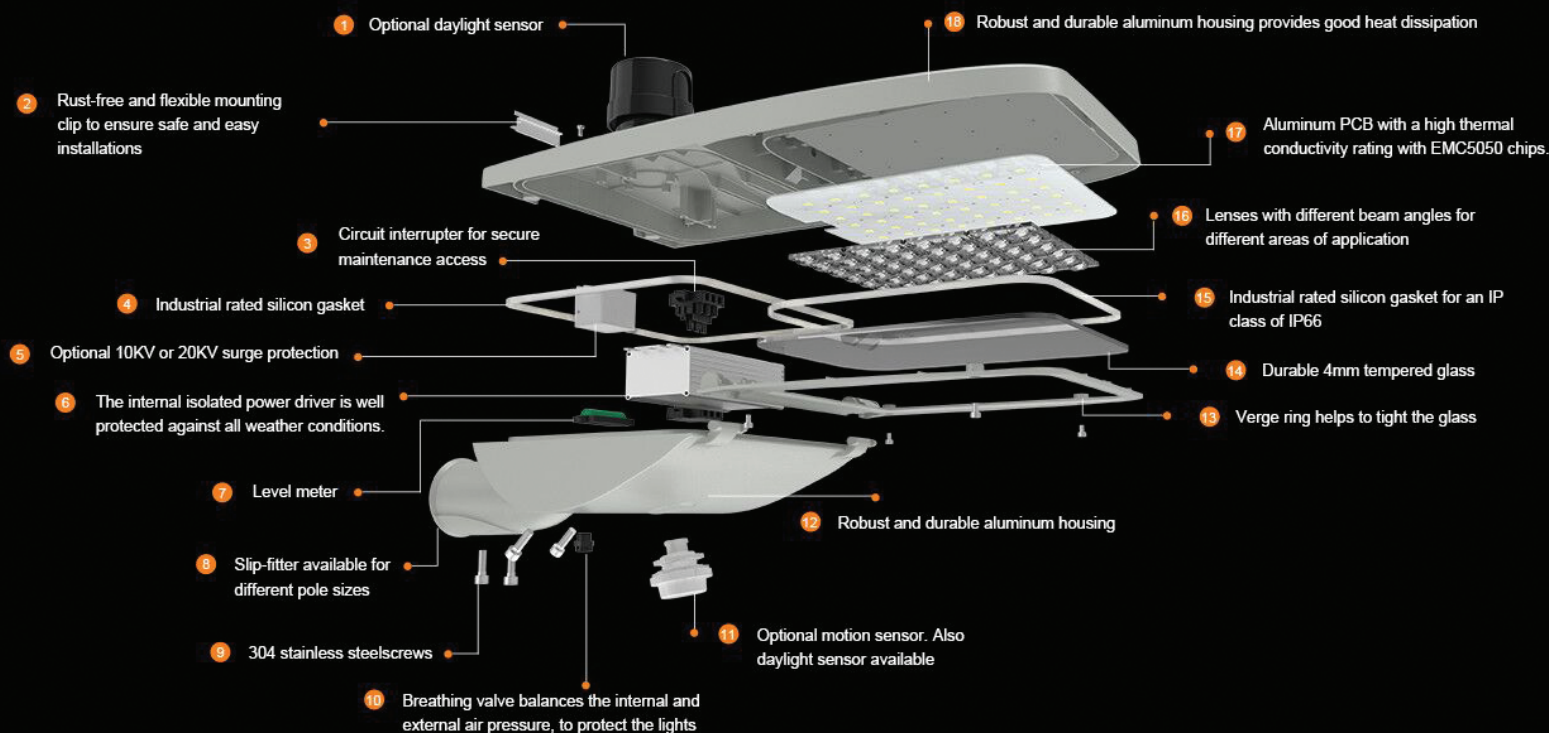

Model	Moc	Lm	Barwa	V	Sprawność	CRI	Kąt Świecenia	IP	Waga	Szybkość	Trwałość L80B10	ON/OFF	Temp. Pracy
HBS-G6pro-30	30W	4200	3000K/4000K/5000K/6000K	100-277V AC	0,95	>70	140°/70° 140°/40°	66	5	95%<1s	100000	≥100000	-30/+50
HBS-G6pro-40	40W	5600			0,95	>70	140°/70° 140°/40°	66	5	95%<1s	100000	≥100000	-30/+50
HBS-G6pro-50	50W	7000			0,95	>70	140°/70° 140°/40°	66	5	95%<1s	100000	≥100000	-30/+50
HBS-G6pro-60	60W	8400		50/60Hz	0,95	>70	140°/70° 140°/40°	66	6,7	95%<1s	100000	≥100000	-30/+50
HBS-G6pro-80	80W	11200		0,95	>70	140°/70° 140°/40°	66	6,7	95%<1s	100000	≥100000	-30/+50	
HBS-G6pro-100	100W	14000		100-277V AC	0,95	>70	140°/70° 140°/40°	66	8,2	95%<1s	100000	≥100000	-30/+50
HBS-G6pro-120	120W	16800		0,95	>70	140°/70° 140°/40°	66	8,2	95%<1s	100000	≥100000	-30/+50	
HBS-G6pro-150	150W	21000		100-277V AC	0,95	>70	140°/70° 140°/40°	66	8,4	95%<1s	100000	≥100000	-30/+50
HBS-G6pro-180	180W	25200		50/60Hz	0,95	>70	140°/70° 140°/40°	66	8,4	95%<1s	100000	≥100000	-30/+50
HBS-G6pro-240	240W	33600	0,95	>70	140°/70° 140°/40°	66	8,4	95%<1s	100000	≥100000	-30/+50		



NEW  
GENERATION  
LED

Technology and  
innovation

www.ledikopro.eu